


KEY FEATURES: Model LC-NB2UW

- Weighs less than 9 lbs! Footprint similar to a legal notepad!
- 1200 ANSI Lumens at 90% uniformity with a 250:1 contrast ratio.
- 3 panel LCD imaging delivers eye-popping, color saturated visuals.
- True SVGA resolution. XGA, SVGA, and VGA compatible.
- Smart data compression / expansion, and video scaling.
- Power zoom and focus. Digital keystone correction.
- Wireless remote with mouse. Laser pointer. 16X digital zoom.
- Accepts Composite and S-Video Input in most major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- 3 Year* Projector Warranty! 6 Month * Lamp Warranty!

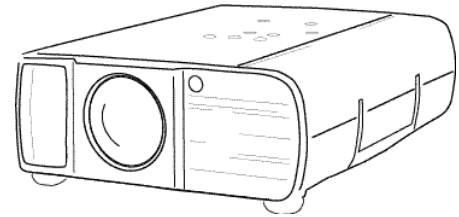

LC-NB2UW & LC-NB2U

INCLUDED ACCESSORIES: Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. Wireless Remote Control with Mouse and batteries (AA x2). Mouse cable for computer PS/2 port. Dust Cover.

OPTIONAL ACCESSORIES: Replacement Lamp. MAC Adapter. MAC Monitor Cable. 9 Pin Serial cable for mouse & RS-232 communications. Mouse cable for ADB port. Soft Carry Bag. Executive Carry Case with Computer Compartment. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate. 33' (10m) Mouse Extension Cable.

SPECIFICATIONS: Model LC-NB2UW

Screen Brightness	1200 ANSI Lumens	Computer: Higher Resolutions	Displayed panned or Smart Compressed
Illumination Uniformity	90%	Computer: Lower Resolution	Displayed normal or Smart Expanded
Size of Color Palette	16.7 Million	Computer: Channels	1
Contrast Ratio	250:1 (Full ON/OFF)	Computer: Inputs	HD15 x 1
Horizontal Resolution	750 TV Lines	Computer: Monitor Out	HD15 x 1
Projection Lamp	150 Watt UHP	Computer: Audio In	Stereo: MiniStereo x 1
Recommended Lamp Replacement	1,000 Hrs.	Video: Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Light Organization	Polarized Beam Splitter	Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Light Distribution	Dichroic Mirror & X-Prism System	Video: Image Sizing	Video Scaling Technology
Imaging System	0.9" PolySilicon active matrix TFT Panels x 3	Video: Channels	1
Screen Pixels	800 x 600 in stripe configuration	Video: Inputs	Composite: RCA x 1, S-Video x 1
Total Pixels	1,440,000 (800 x 600) x 3	Video: Audio: Input	RCA x 2 (L&R)
Lens Type	Power Zoom and Focus	Audio: Amplifier	Mono: 1 Watts RMS
Lens Specs	Speed: f:1.7-2.0; FL: 1.31-1.7 in. (33.2-43.1 mm.)	Audio: Built In Speakers	1.58 x 1.18 in. (4x3cm) x 1
Lens Ratios	Zoom Max:Min: 1.3:1; Throw:Width: 1.80-2.33:1	Audio Line Output	Stereo: MiniStereo x 1
Image Diagonal	31-300 in. (78.74-762 cm.)	Fan Noise	Approximately 42 dB.
Image Width	2-20 ft. (0.6-6.1 m.)	Size (H x W x D)	4.1x9.5x12.8 in. (102.5x239x323 mm.)
Throw Distance	4.6-46 ft. (1.4-14 m.)	Weight	8.6 lbs. (3.9kg)
Front Elevation / Maximum Tilt	up to 10° up	Packaged Size (H x W x D)	10.4x14.1x17.6 in. (262x356x446 mm.)
Anti Keystone	Fixed Image Offset, Ratio (Top:Bottom) 20:1	Packaged Weight	17.2 lbs. (7.8 kg.)
Keystone Correction	Digital (>+/- 12 degrees)	Power Requirements	100-240V AC, 50/60 Hz.
Scanning Frequency	Auto: H Sync. 15-80Hz; V Sync. 50-100 Hz.	Power Consumption / Heat	240 Watts / 819 BTU/hr. (207 KC/hr.)
Dot Clock	135 MHz.	Power Cord	10' (3M) Type 3, Detachable
Image Orientation	Normal, Reversed, Inverted	Safety Compliance	UL Listed
Local Control	Full Function	Security Facilities	Kensington® Security Slot
Remote Proj & Mouse Ctrl	Wireless (Infra Red) with Laser Pointer x 1	User Maintenance	Clean Air Filter, Replace Lamp
Control Port (Mouse / RS-232 Communications)	Mini DIN 8 Pin x 1	Warranty: Projector	3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
Computer Native Resolution	800 x 600 (SVGA)	Warranty: Lamp	6Mo. / 1000Hr. *(Pro-Rata Replacement of Failed Lamp)
Computer: Compatibility	XGA, SVGA, VGA		* Whichever occurs first.
Computer: Formats	1024x768, 800x600, 640x480		

The following warning is required by the US FDA and pertains to the laser pointer in the wireless remote control of this projector.
Caution! Laser Radiation – Do not stare into beam. Max. Output: 1 mW. Wave Length: 660 +/- 20 mm. Class II Laser Product.

LC-NB2U (PC Card Model)

In addition to the features and specifications above, computerless slide shows can be created and presented with this model, using supplied software and removable flash memory. Software requires a Pentium CPU, Windows 95/98, and a minimum 32 Mb RAM and 10 Mb HD: as supplied, programming relies on notebook computer's PCMCIA slot. Includes 8 Mb SmartMedia flash memory card, PCMCIA adapter, and MCI SlideShow software on CD-ROM. More memory & other programming accessories available. Weight 8.82 lb (4.0 kg.).

Specifications subject to change without notice. ©2000 EIKI International, Inc. Printed in the USA. May 17, 2000

Eiki International, Inc., 26794 Vista Terrace Dr., Lake Forest, CA 92630 Tel: 800-242-3454; Fax: 800-457-3454, E-mail: infousa@eiki.com
In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: infocanada@eiki.com

Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>