




LC-SM3

SVGA Mini Projector Series

KEY FEATURES: Model LC-SM3

- Weighs only 6.2 lb. (2.8KG)! Footprint smaller than a lettersize notepad.
- True SVGA resolution. XGA, SVGA, VGA and MAC compatible.
- 1000 ANSI Lumens bright, at 90%+ uniformity, and a 350:1 contrast ratio.
- Quiet, unobtrusive operation (only 37 dBA).
- 3 panel LCD imaging delivers rich, color saturated visuals.
- Smart data compression/expansion, and video scaling fills the screen.
- Anti Keystone image offset, plus Digital Keystone Correction.
- Wireless remote with mouse. 4-Power Digital Zoom, Freeze, and No Show.
- Accepts Composite, S-Video, and DVD & HDTV Component Video Input.
- Displays both Regular 4:3 and Widescreen 16:9 aspect ratio video formats.
- Soft carry bag included. 3 Year* Projector Warranty.

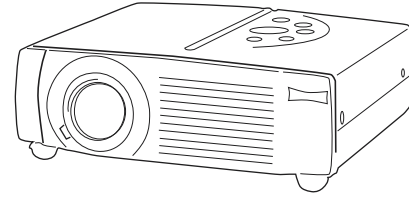

LC-SM3

INCLUDED ACCESSORIES: Owner's Manual. AC Power Cord. Lens Cover. VGA-type Computer Input Cable. Wireless Remote Control With Battery (Lithium, button type). Soft Carry Bag.

OPTIONAL ACCESSORIES: Replacement Lamp. MAC Adapter. Wireless Remote Control with Mouse and Laser Pointer & Batteries (AA x 2). Mouse cables for computer PS/2, Serial, ADB and Ports. 33' (10m) Mouse Extension Cable for Control Port. Soft Carry Bag for Projector and Notebook Computer. Luggage-Style Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels and Telescoping Handle. Ceiling Mount. Ceiling Post and Plate.

SPECIFICATIONS: Model LC-SM3

Screen Brightness	1000 ANSI Lumens	Computer: Channels	1
Illumination Uniformity	90%+	Computer: Inputs	HD15 x 1
Size of Color Palette	16.7 Million	Computer: Audio In	Stereo: MiniStereo x 1
Contrast Ratio	350:1 (Full ON/OFF)	Video: Compatibility	NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
Horizontal Resolution	500 TV Lines	Video: Formats Supported	Normal 4:3 and Wide Screen 16:9
Projection Lamp	150 Watt UHP	Video: Image Sizing	Video Scaling Technology
Imaging System	0.7" PolySilicon active matrix TFT Panels x 3	Video: Channels	1
Screen Pixels	800 x 600 in stripe configuration	Video: In	RCA x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr) S-Video x 1
Total Pixels	1,440,000 ((800 x 600) x 3)	Video: HDTV Standards Supported	1080i, 1035i, 720p, 575i/p, 480i/p
Lens Type	Manual Zoom and Focus	Video: Audio: Input	Stereo: MiniStereo x 1
Lens Specs	Speed: f:1.6-1.78; FL: 1.13-1.36 in. (28.7-34.5 mm.)	Audio: Amplifier	Mono: 1 Watt RMS
Lens Ratios	Zoom Max:Min: 1.2:1; Throw:Width: 2.0-2.4	Audio: Built In Speakers	Mono: 1.1 in. (2.8 cm) x 1
Image Diagonal	34-200 in. (86.4-508 cm.)	Audio: Speaker Output	Mono: MiniStereo x 1
Image Width	2.3-13.3 ft. (0.7-4.07 m.)	Fan Noise:	37 dBA
Throw Distance	4.6-32 ft. (1.4-9.75 m.)	Cabinet Size (H x W x D)	3.0 x 10.2 x 9.1 in. (75.8 x 257 x 230 mm.)
Front Elevation/Maximum Pitch	up to 10.60 up / +/-20° (can be inverted)	Extremities (Additional):	(H) Leg: 0.6 in. (14.9 mm.)
Anti Keystone	Optical: Fixed Offset (Top:Bottom) Ratio 19:1	Weight	6.18 lbs. (2.8 kg.)
Keystone Correction	Digital: Variable Adjustment +20° ~ -20°	Packaged Size (HxWxD)	12.3 x 14.8 x 14.0 in. (312 x 374 x 355 mm.)
Scanning Frequency	Auto: H Sync. 15-80 kHz; V Sync. 50-100 Hz.	Packaged Weight	14.1 lbs. (6.4 kg.)
Dot Clock	100 MHz	Power Requirements	100-240V AC, 50/60Hz.
Image Orientation	Normal, Reversed, Inverted	Power Consumption / Heat	250 Watts / 854 BTU/hr. (215 KC/hr.)
Local Control / Power Management	Full Function / Auto Shut-Off	Power Cord	10' (3M) Type 3, Detachable
Remote Projector Control	Infra Red x 1	Safety Compliance	UL Listed
Control Port (Mouse / RS-232)	USB x 1, Mini DIN 8 Pin x 1	Security Facilities	Kensington® Security Slot
Computer Native Resolution	800 x 600 (SVGA)	Operating Temperature	41-95°F (5-35°C)
Computer: Compatibility	XGA, SVGA, VGA & MAC	User Maintenance	Clean Air Filter, Replace Lamp
Computer: Formats	1024x768, 800x600, 640x480	Warranty: Projector	3 Yr. / 6000 Hr. *(Parts/Labor to Correct Defects)
Computer: Image Sizing	Normal, or Smart Compressed or Expanded	Warranty: Lamp	90 Days (Failed Lamp Replaced Pro-Rata)

* whichever occurs first

Specifications subject to change without notice. ©2002 Eiki International, Inc. Printed in the USA. January 15, 2002

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688. Tel: 800-242-3454; Fax: 800-457-3454, E-mail:usa@eiki.com
In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com
Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>