




LC-XNB4MS

KEY FEATURES: Model LC-XNB4MS

- Weighs less than 9 lbs! Footprint similar to a legal notepad!
- 2000 ANSI Lumens, 85% uniformity, and 350:1 contrast ratio.
- 3 panel LCD imaging delivers a rich, color saturated picture.
- True XGA resolution. SXGA, XGA, SVGA, and VGA compatible.
- Quiet operation: fan noise as low as 37 dBA.
- Smart data compression / expansion, and video scaling.
- Power zoom and focus. Digital keystone correction.
- Wireless remote with mouse. 7X digital zoom.
- Accepts Composite, S, and Component Video in all major standards.
- Displays both Regular 4:3 and Widescreen 16:9 ratio video formats.
- Supports HDTV Input at 480i/p, 575i/p, 720p, 1035i, and 1080i.
- 3 Year* Projector Warranty!

XGA Notebook Projector

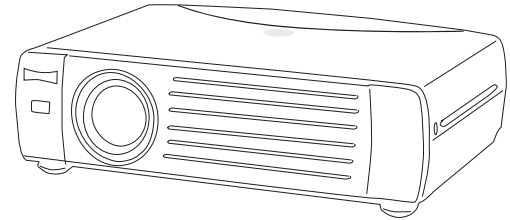

LC-XNB4MS

INCLUDED ACCESSORIES: Owner's Manual. AC Power Cord. Lens Cover. HD15 (VGA-type) Computer Input Cable. Wireless Remote Control With Mouse and Batteries (AA x 2). Mouse cable for computer PS/2 Port. Stereo Audio Cable. Composite Video Cable. Soft Carry Bag.

OPTIONAL ACCESSORIES: Replacement Lamp. MAC Adapter. MAC Monitor Cable. 9 Pin Serial cable for mouse & RS-232 communications. Mouse cable for ADB port. Executive Carry Case with Computer Compartment. Luggage-Style ("wheelie") Carrying Case with Wheels, Telescoping Handle, and Detachable Computer Compartment. ATA-Style Shipping Case with Wheels & Telescoping Handle. Ceiling Mount. Ceiling Post & Plate. 33 (10m). Mouse Extension Cable for Control Port. Media Card Imager (Compact Flash Computerless Slide Show System). Wireless Imager (WiFi Content Delivery and Projector Control System).

SPECIFICATIONS: Model LC-XNB4MS

Screen Brightness2000 ANSI Lumens
 Illumination Uniformity 85%
 Size of Color Palette 16.7 Million
 Contrast Ratio 350:1 (Full ON/OFF)
 Horizontal Resolution 800 TV Lines
 Projection Lamp 200 Watt UHP
 Estimated Lamp Life 2000 Hours
 Imaging System 0.9" PolySilicon active matrix TFT Panels x 3
 Screen Pixels 1024 x 768 in stripe configuration
 Total Pixels 2,359,296 ((1024 x 768) x 3)
 Lens Type Power Zoom and Focus
 Lens Specs Speed: f:1.9-2.1; FL: 0.84-1.01 in. (21.3-25.6 mm)
 Lens Ratios Zoom Max:Min: 1.2:1; Throw:Width: 1.15-1.39:1
 Image Diagonal 31-300 in. (78.74-762 cm)
 Image Width 2-20 ft. (0.6-6.1 m.)
 Throw Distance 3.6-27.7 ft. (1.1-8.44 m.)
 Front Elevation / Maximum Tilt up to 15.6° up / +/- 20°
 Anti Keystone Fixed Image Offset, Ratio (Top:Bottom) 9:1
 Vertical Keystone Correction Digital: up to 20° up or down
 Horizontal Keystone Correction Digital: up to 10° left or right.
 Scanning Frequency Auto: H Sync. 15-100kHz; V Sync. 50-100Hz
 Dot Clock 140 MHz
 Image Orientation Normal, Reversed, Inverted
 Local Control / Power Management Full Function / Auto Shut-Off
 Remote Proj & Mouse Ctrl Wireless (Infra Red) x 1
 Control Port (Mouse / RS-232) USB x 1, Mini DIN 8 Pin x 1
 Computer Native Resolution 1024 x 768 (XGA)
 Computer: Compatibility SXGA, XGA, SVGA, VGA
 Computer: Formats 1280x1024, 1024x768, 800x600, 640x480
 Computer: Higher Resolutions Displayed panned or Smart Compressed

Computer: Lower Resolution Displayed normal or Smart Expanded
 Computer: Channels 1
 Computer: Inputs DVI-1 x 1, HD15 (VGA-type) with supplied cable
 Stereo: MiniStereo x 1
 Computer: Monitor Out HD15 x 1
 Video: Compatibility NTSC / PAL / SECAM / NTSC 4.43 / PAL-M&N
 Video: Formats Supported Normal 4:3 and Wide Screen 16:9
 Video: Image Sizing Video Scaling Technology
 Video: Channels 1
 Video: In RCA x 3 (Composite/Component: Y,Pb/Cb,Pr/Cr) S-Video x 1
 Video: Audio: Input RCA x 2 (L&R)
 Audio: Amplifier Mono: 1 Watts RMS
 Audio: Built In Speaker 1.58 x 1.18 in. (4x3cm) x 1
 Audio: Line Output RCA x 2 (L&R)
 Fan Noise 37 dBA
 Cabinet Size** (HxWxD) 2.5 x 13.1 x 10.3 in. (89.5 x 333 x 260.9 mm.)
 ** excluding foot
 Weight 9.5 lbs. (4.3 kg)
 Packaged Size (H x W x D) 15 x 18 x 14 in. (379 x 457 x 356 mm)
 Packaged Weight 19.4 lb (8.8 kg)
 Power Requirements 100-240V AC, 50/60Hz
 Power Consumption / Heat 300 W / 1024 BTU/hr (258 Kcal/hr)
 Power Cord 10' (3M) Type 3, Detachable
 Safety Compliance UL Listed
 Operating Temperature 41-95°F (5-35°C)
 User Maintenance Clean Air Filter, Replace Lamp
 Security Facilities Kensington® Security Slot
 Warranty: Projector 3 Yr. / 6000 Hr. *(Parts & Labor to Correct Defects)
 Warranty: Lamp 90 Days (Failed Lamp Replaced Pro-Rata)
 * Whichever occurs first

Specifications subject to change without notice. ©2002 Eiki International, Inc. Issued July 23, 2002

Eiki International, Inc., 30251 Esperanza, Rancho Santa Margarita, CA 92688. Tel: 800-242-3454; Fax: 800-457-3454, E-mail:usa@eiki.com
 In Canada, 310 First St.- Unit 2, P.O. Box 156, Midland, ON L4R 4K8 Phone: 800-563-3454, Fax: 800-567-4069 E-mail: canada@eiki.com
Fax-on-Demand: (Toll Free) 877-345-4329 • Visit our World Wide Web site: <http://www.eiki.com>